
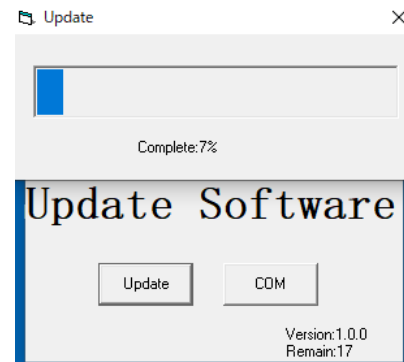
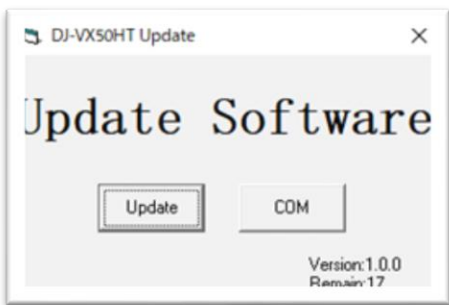
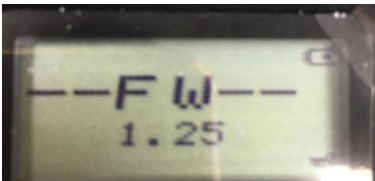


DJ-VX50HT Firmware upgrade Instructions.

1. Install  DJ-VX50HT Update_V1.25setup.exe
2. Run "DJ-VX50HT Upgrade" in "Administrator mode"
 - (Place the Mouse cursor on "DJ-VX50HT Upgrade" icon and Right click the Mouse button)
Select "**Properties**" and click on "**Compatibility**" Check on "**Run this program as an Administrator**"
3. Plug in the Alinco USB Data Cable ERW-7 or ERW-15 to your PC **and radio**. (Make sure to check the "COM Port" Number assigned to the cable in your PC's Device manager settings). **Power on the radio**.
4. Run "**DJ-VX50HT Upgrade**" Select COM Port assigned to the Data cables
5. If you get an error try to run the attached "bat" file.
6. Select "**Upgrade**" and this should initiate the Upgrade process.



7. Check the firmware version



- Press FUNC then press and hold "#"key until radio keypad is locked.
 - Press the "ESC" key 5 times. The LCD will display the version is 1.25
8. Remember to unlock the keypad after finish (press FUNC then press and hold "#"key to unlock keypad)
 9. If you would like to reset radio to factory default setting status just press,
 - Press and hold "MONI" key + PTT key and turn on the Radios
 - Let go of the keys. You will see "DSP" Freq.
 - Press arrow "Up" Key and you will see "RESET"
 - Turn the main dial knob to "FACT" and hit "FUNC" key
 - Enter "000000" (6 digits) and the unit will perform RESET